


Cat.7 S/FTP 23AWG 35% Sc. Horizontal Cable ***Description & Features***

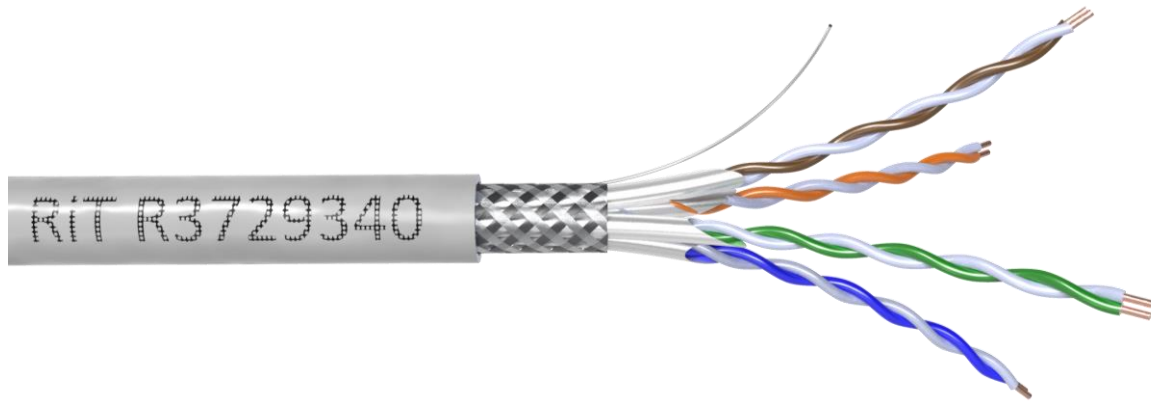

The Category 7 S/FTP Horizontal Cable contains 4 individually foil-shielded twisted pairs, cabled together with a drain wire, overall braid-shielded and jacketed with a Low Smoke, Zero Halogen (LSZH) compound

Applications: Data processing and information systems, Indoor use, Fixed or portable installations

- Exceeds Category 7 cables specification per IEC 61156-5 Cat.7, Cat. 6A, Cat. 6 and Cat. 5e and tested up to 1000 MHz
- Very high performance, designed to support protocols running at up to 10Gbps
- Cable flammability complies with IEC 60332-1, UL 1581 VW-1
- RoHS compliant: 2011/65/EU
- Applicable Standards: IEC 61156-5, ISO/IEC 11801 Class F
- Low Smoke Zero Halogen (LSZH)
- 100% factory tested



Cat.7 S/FTP 23AWG 35% Sc. Horizontal Cable ***Design & Materials***

Outer Jacket Diameter:	Ø7.1 mm nom.
Outer Jacket Material:	FR-LSZH
Conductor Material:	Annealed Bare Copper
Conductor Size:	23 AWG
Conductor Construction:	Solid
Insulation Material	Cellular PO
Insulation O.D.:	1.35 mm nom.
Conductor unit identification:	Solid/stripe
Color Code:	Per TIA/EIA 568-B
Ind. Shield Material:	Aluminum/Polyester Foil
Ind. Shield Design	100% Coverage
Conductor unit lay-up:	Twisted Pairs
Overall Shield:	Braid
Braid Material:	Annealed Tinned-copper
Braid Coverage:	35 % nom.
Overall Drain-wire Material:	Annealed Tinned Copper
Overall Drain-wire size:	0.41 mm
Overall Drain-wire Construction:	Solid
Total number of conductors:	8
Outer Jacket Color:	Light Gray
Weight	50 kg/km
RoHS Compliant	2011/65/EU



Cat.7 S/FTP 23AWG 35% Sc. Horizontal Cable *Performance*

Frequency Range:	1 - 600 MHz
Impedance:	100 Ω
Coupling Attenuation:	Type I
Max. DC Resistance :	73 Ω /km@20°C
Max. Resistance Unbalance:	2 %
Capacitance Unbalance:	1.2 pF/m max.
Velocity of Propagation:	78 % nom.
Propagation Delay Skew:	25 ns/100m max.
Dielectric Strength:	700 V/minute
Dielectric Strength to Shield:	700 V/minute
Min. Insulation Resistance :	5 G Ω •km
Tensile Strength - Short Term:	100N max.
Min. Bend Radius:	60mm
Max. Operating Temperature:	+65 °C
Min. Operating Temperature:	-40 °C
Max. Storage Temperature:	+65 °C
Min. Storage Temperature:	-40 °C

Electrical Properties per IEC 61156-5 ED. 2:

Freq. MHz	Attenuation dB/100m 20°C		PS NEXT Loss dB		NEXT Loss dB		RL dB		PS ANEXT dB		PS ELFEXT dB		ELFEXT dB	
	Typical Value	Cat. 7	Typical Value	Cat. 7	Typical Value	Cat. 7	Typical Value	Cat. 7	Typical Value	Cat. 7	Typical Value	Cat. 7	Typical Value	Cat. 7
1	2.0	2.0	105.0	75.0	108.0	78.0	22.0	20.0	68.0	N/A	95.0	75.0	98.0	78.0
4	3.6	3.7	98.0	75.0	101.0	78.0	25.0	23.0	68.0	N/A	90.0	75.0	93.0	78.0
10	5.6	5.8	95.0	75.0	98.0	78.0	28.0	25.0	68.0	N/A	86.0	71.0	89.0	74.0
20	7.9	8.3	90.0	75.0	93.0	78.0	28.0	25.0	68.0	N/A	80.0	65.0	83.0	68.0
30	9.7	10.2	85.0	75.0	88.0	78.0	27.0	23.8	68.0	N/A	76.0	61.5	79.0	64.5
100	18.0	19.0	80.0	69.4	83.0	72.4	24.0	21.1	68.0	N/A	66.0	51.0	69.0	54.0
150	22.4	23.6	78.0	66.7	81.0	69.7	22.0	18.8	65.0	N/A	63.0	47.5	66.0	50.5
200	26.0	27.5	78.0	65.0	81.0	68.0	21.0	18.0	65.0	N/A	60.0	45.0	63.0	48.0
250	29.4	31.0	75.0	63.4	78.0	66.4	20.0	17.3	62.0	N/A	58.0	43.0	61.0	46.0
300	32.5	34.2	75.0	62.2	78.0	65.2	19.0	17.3	62.0	N/A	52.0	41.5	55.0	44.5
400	38.0	40.0	70.0	60.4	73.0	63.4	19.0	17.3	62.0	N/A	49.0	38.9	52.0	41.9
500	43.0	45.2	70.0	58.9	73.0	61.9	19.0	17.3	62.0	N/A	47.0	37.0	50.0	40.0
600	47.6	50.1	70.0	57.7	73.0	60.7	19.0	17.3	62.0	N/A	45.0	35.4	48.0	38.4



For more information visit our website
www.rittech.com

Cat.7 S/FTP 23AWG 35% Sc. Horizontal Cable ***Ordering Information***

Part Number	Description
R3729340	CAT 7 S/FTP 23AWG 35% Sc. Horizontal Cable, LSZH, 500m Reel