PV+ Cross-Connect Copper Patch Cord
Installation Instruction

Instruction Sheet 4561200
Rev A.0

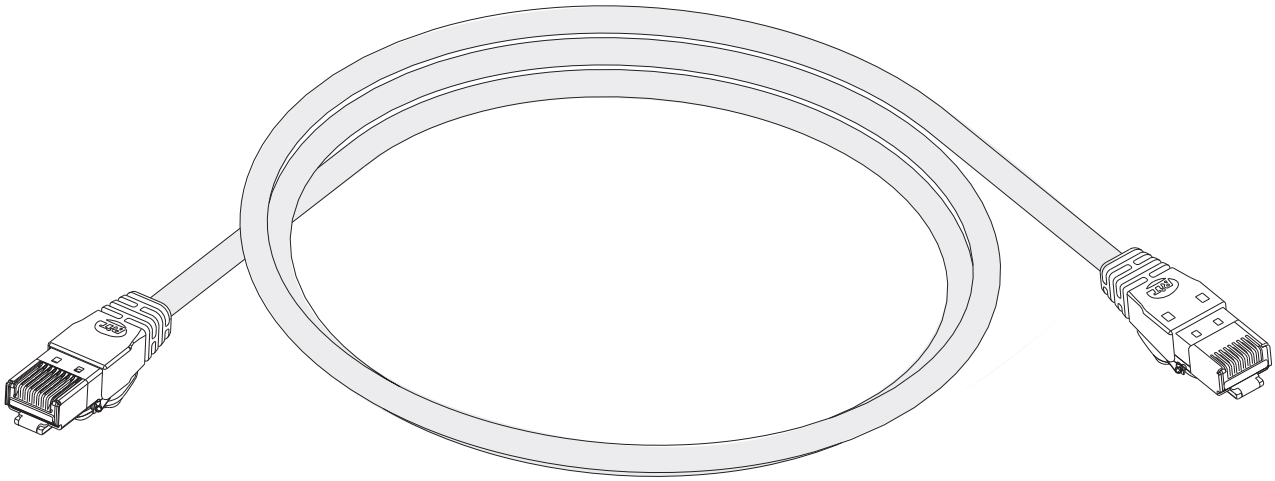

RiT PV+ Cross-Connect Copper Patch Cords are designed to connect between two RJ45 ports of RiT's PV+ Copper Frames in the environment of cross connect topology.

2 contacts below each RJ45 ports of the PV+ Copper Frame are used to monitor the physical layer connectivity when they are connected with a PV+ Cross-Connect Copper Patch Cords.

Fig-1 illustrates such a connection

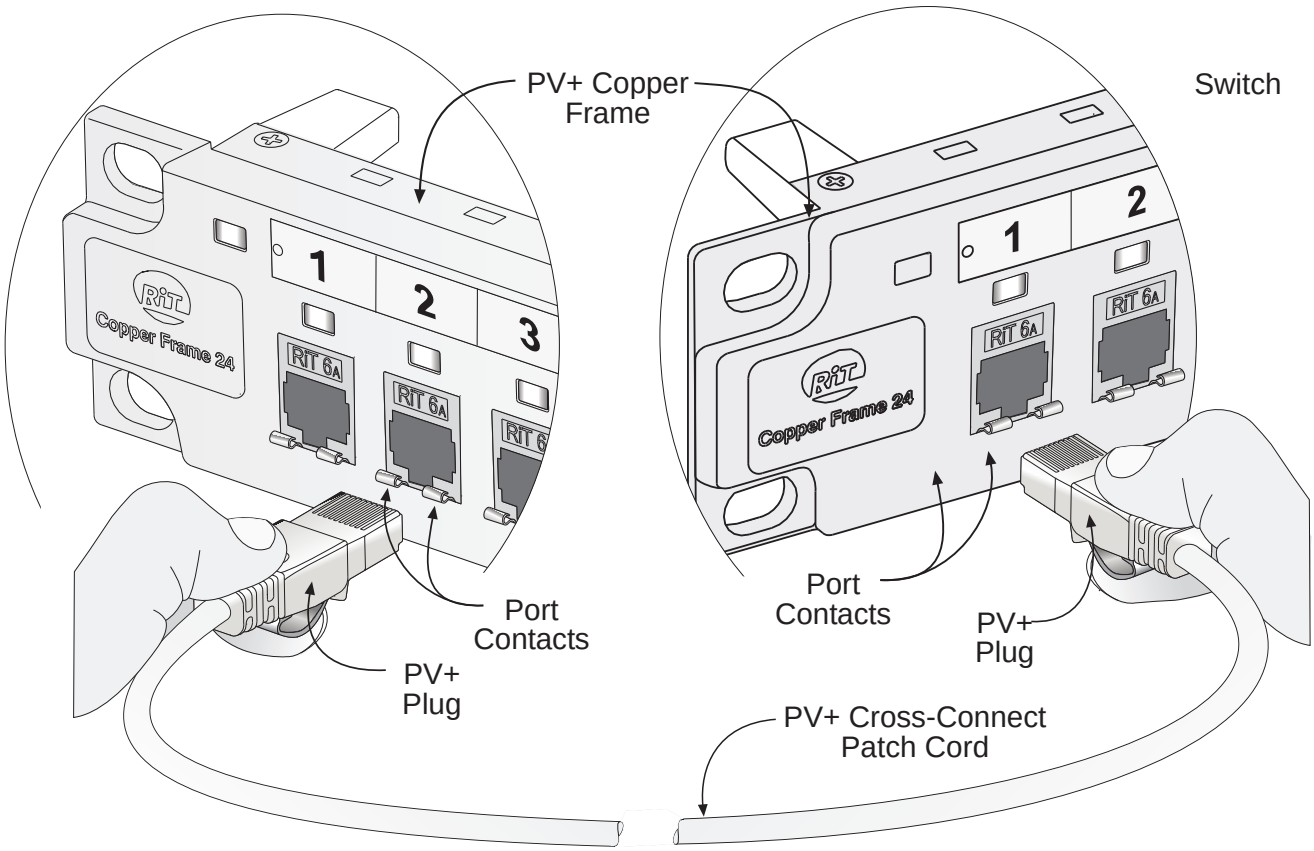

Fig-1: PV+ Cross Connect patch cord assembly

RIT International Headquarter
Tel: +972.77.270.7270
Fax: +972.3.647.4115
E-mail: mkt@rittech.com

RiT Office in China
Tel: +86.21.6445.3181
E-mail: marketing@rittech.com.cn

RiT Rep. in India
Tel: +91.22.611.0352
E-mail: mktg.india@rittech.com