F/O Outdoor Enclosure

Features

- The closure adopts horizontal mechanical sealing and advanced internal structure design.
- It can be installed one 1:4, 1:8, 1:16 module PLC splitter having 17 adapters with one splice tray.
- There are different drop cable elements to be chosen (Φ5, 2*3) to input/output (special type can be customized).
- The closure is spacious enough for winding and storing fibers.
- Install two Splice Trays inside without splitters.
- The patented sealing structure keep good sealing performance after re-entry and re-using.
- It could save the installation time and improve work efficiently
- Suitable for bunchy fibers
- IP68 Rating
- Aerial, underground, wall-mounting, hand hole-mounting and duct-mounting
- It's especially applicable to FTTH optical fiber distribution
- Operating, Storage & Installation Temperature Range: -40℃-+65℃
- RoHS Compliant

F/O Outdoor Enclosure
Specifications

Structural Drawing

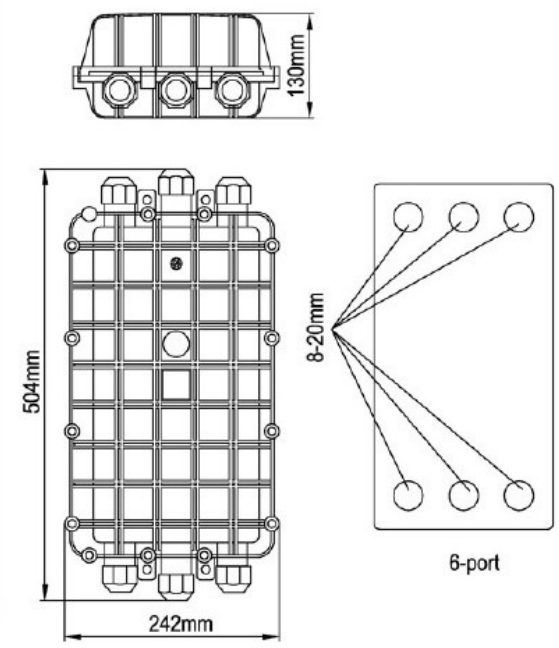

Standard Accessories

No.	Name	Quantity	
1	Insulation tape	1 roll	
2	Labeling paper	1 pc	
3	Abrasive cloth	1 pc	
4	Earthing wire	1pc	
5	Nylon tie	1 set	

No.	Name	Quantity	
6	Desiccant	2 bags	
7	Heat shrinkable protective sleeve	1 bag	
8	Special wrench	2 pcs	
9	Hanging hook	1 set	
10	Hexagon wrench	2 pcs	

F/O Outdoor Enclosure
Specifications

Optional Accessories

No.	Name	Quantity	
1	Pressure testing valve	1 pc	
2	Earthing deriving device	1 pc	
3	Buffer tube for bunchy fiber	1 roll	
4	Patch cord	_	

No.	Name	Quantity	
5	Wall mounting bracket	1 set	
6	Adapter	_	
7	Pigtail	_	

F/O Outdoor Enclosure

Ordering Information

Number	Description
R4940420	F/O Outdoor Enclosure with 1:4 PLC Splitter & Splice Tray
R4940421	F/O Outdoor Enclosure with 1:8 PLC Splitter & Splice Tray
R4940422	F/O Outdoor Enclosure with 1:16 PLC Splitter & Splice Tray
R4940423	F/O Outdoor Enclosure with Splice Tray, 1x24F
R4940424	F/O Outdoor Enclosure with Splice Tray, 2x24F